

INCONEL® alloy 603XL (patent applied for) is a Ni-Cr alloy with the addition of silicon, molybdenum and rare earth elements. The outstanding characteristics of INCONEL alloy 603XL are its resistance to high temperature oxidation and nitridation. The alloy has high mechanical strength and is readily formed, machined and welded.

The unique combination of high temperature properties make the alloy suitable for many thermal processing applications such as furnace muffles, fixtures, radiant tubes, strand annealing tubes, furnace mesh belts and refractory anchors.

The excellent resistance to oxide spalling make INCONEL alloy 603XL an excellent choice for applications where oxide contamination can not be tolerated such as the electronics, glass and ceramics / tableware industries. Its excellent resistance to nitridation can provide a longer service life in high temperature nitrogen based atmospheres, such as in furnace mesh belts utilized in the powder metal sintering industry and other thermal processing applications.

**Table 1 - Chemical Composition, wt %**

|                   |          |
|-------------------|----------|
| Nickel .....      | Balance* |
| Chromium .....    | 15-23    |
| Molybdenum.....   | 4.0 max. |
| Titanium.....     | 0.5 max. |
| Aluminum.....     | 0.5 max. |
| Carbon.....       | 0.3 max. |
| Manganese.....    | 0.3 max. |
| Silicon.....      | 2.0 max. |
| Rare earths ..... | 0.1 max. |

\*Reference to the 'balance' of a composition does not guarantee this is exclusively of the element mentioned but that it predominates and others are present only in minimal quantities.

## Product Forms

Contact Special Metals.

Publication Number SMC-060  
Copyright © Special Metals Corporation, 2004 (Sept 04)

INCONEL is a trademark of the Special Metals Corporation group of companies.

The data contained in this publication is for informational purposes only and may be revised at any time without prior notice. The data is believed to be accurate and reliable, but Special Metals makes no representation or warranty of any kind (express or implied) and assumes no liability with respect to the accuracy or completeness of the information contained herein. Although the data is believed to be representative of the product, the actual characteristics or performance of the product may vary from what is shown in this publication. Nothing contained in this publication should be construed as guaranteeing the product for a particular use or application.

## Physical Properties

|  |           |
|--|-----------|
| Density, lb/in <sup>3</sup> .....            | 0.308     |
| g/cm <sup>3</sup> .....                      | 8.54      |
| Melting Range, °F.....                       | 2516-2552 |
| °C.....                                      | 1380-1400 |
| Electrical Resistivity, ohm circ mil/ft..... | 698       |
| ohm cm.....                                  | 116       |

## Thermal Properties

| Temperature | Specific Heat | Thermal Conductivity           | Coefficient of Expansion    |
|-------------|---------------|--------------------------------|-----------------------------|
| °F          | Btu/lb-°F     | BTU-in/ ft <sup>2</sup> -hr-°F | in./in.-°F X10 <sup>6</sup> |
| 200         | 0.113         | 74.453                         | 7.13                        |
| 400         | 0.116         | 83.949                         | 7.46                        |
| 600         | 0.119         | 95.836                         | 7.70                        |
| 800         | 0.126         | 108.284                        | 7.91                        |
| 1000        | 0.135         | 123.010                        | 8.17                        |
| 1200        | 0.143         | 139.308                        | 8.49                        |
| 1400        | 0.148         | 155.214                        | 8.86                        |
| 1600        | 0.151         | 168.683                        | 9.24                        |
| 1800        | 0.154         | 178.752                        | 9.59                        |
| 2000        | 0.160         | 186.716                        | 9.98                        |
| 2100        | 0.163         | 197.294                        | -                           |
| 2200        | 0.167         | 219.804                        | -                           |
| °C          | J/kg-°C       | W/m-°C                         | µm/m-°C                     |
| 23          | 439           | 11                             | -                           |
| 100         | 467           | 12                             | 12.87                       |
| 200         | 491           | 14                             | 13.42                       |
| 300         | 506           | 15                             | 13.79                       |
| 400         | 515           | 17                             | 14.14                       |
| 500         | 524           | 18                             | 14.56                       |
| 600         | 608           | 23                             | 14.98                       |
| 700         | 610           | 24                             | 15.59                       |
| 800         | 623           | 25                             | 16.15                       |
| 900         | 625           | 26                             | 16.80                       |
| 1000        | 655           | 28                             | 17.37                       |
| 1100        | 673           | 30                             | 18.01                       |
| 1200        | 699           | 33                             | -                           |

**INCONEL® alloy 603XL**



# INCONEL® alloy 603XL

## Mechanical Properties

| Temperature, °F | Young's Modulus, 10 <sup>6</sup> psi | Shear Modulus, 10 <sup>6</sup> psi | Poisson's Ratio | Temperature, °C | Young's Modulus, GPa | Shear Modulus, GPa | Poisson's Ratio |
|-----------------|--------------------------------------|------------------------------------|-----------------|-----------------|----------------------|--------------------|-----------------|
| 72              | 31.8                                 | 11.9                               | 0.33            | 22              | 218.6                | 81.9               | 0.33            |
| 200             | 31.3                                 | 11.7                               | 0.33            | 100             | 215.3                | 80.7               | 0.33            |
| 400             | 30.5                                 | 11.4                               | 0.34            | 200             | 210.2                | 78.7               | 0.34            |
| 600             | 29.5                                 | 11.0                               | 0.34            | 300             | 204.4                | 76.3               | 0.34            |
| 800             | 28.5                                 | 10.5                               | 0.36            | 400             | 198.2                | 73.7               | 0.34            |
| 1000            | 27.5                                 | 10.2                               | 0.35            | 500             | 191.5                | 71.0               | 0.35            |
| 1200            | 26.1                                 | 9.6                                | 0.36            | 600             | 184.4                | 68.1               | 0.35            |
| 1400            | 24.7                                 | 9.1                                | 0.36            | 700             | 176.3                | 64.9               | 0.36            |
| 1600            | 23.2                                 | 8.5                                | 0.36            | 800             | 166.8                | 61.4               | 0.36            |
| 1800            | 20.7                                 | 8.1                                | 0.36            | 900             | 155.1                | 57.2               | 0.36            |
| 1900            | 18.9                                 | –                                  | –               | 1000            | 137.9                | –                  | –               |
| 2000            | 17.1                                 | –                                  | –               | 1100            | 115.2                | –                  | –               |

## Tensile Properties

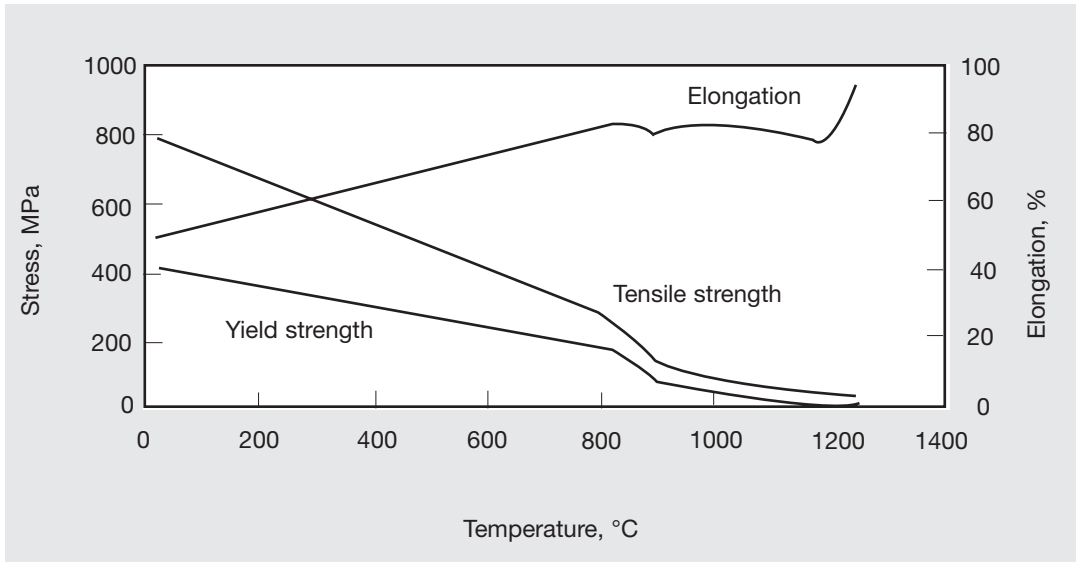


Figure 1. Tensile Properties.

## High Temperature Corrosion

### Oxidation Resistance

INCONEL alloy 603XL has excellent oxidation resistance to 1250°C (2282°F) with the alloying additions promoting excellent oxide scale adherence and reducing the rate of mass change in both static and cyclic conditions.

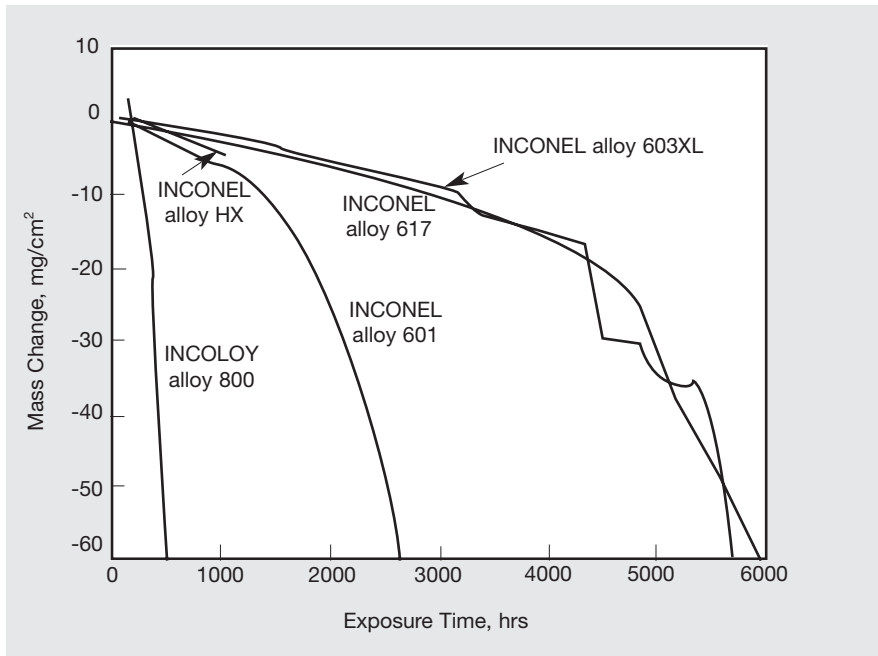


Figure 2. Mass Change After Exposure to Air + 5% Water Vapor at 1100°C.



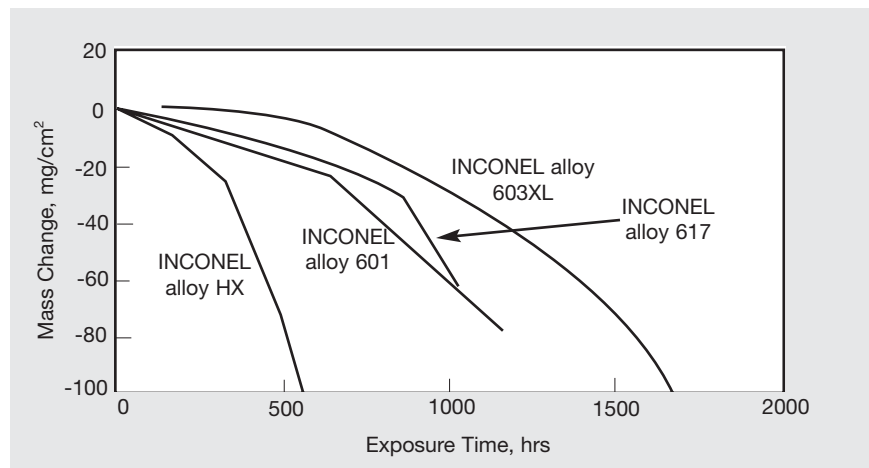


Figure 3. Mass Change After Exposure to Air + 5% Water Vapor at 1200°C.

# INCONEL® alloy 603XL

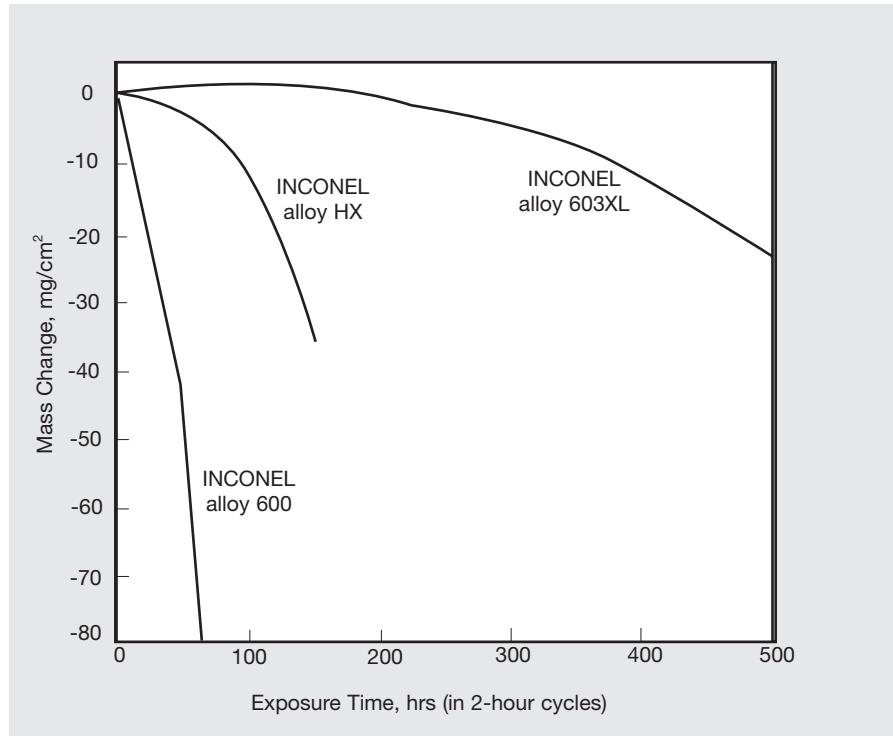

**Figure 4.** Mass Change After Cyclic Exposure in Oxygen at 1200°C. (One cycle = 2 hrs at temperature + 10 mins cooling to ambient temperature.)

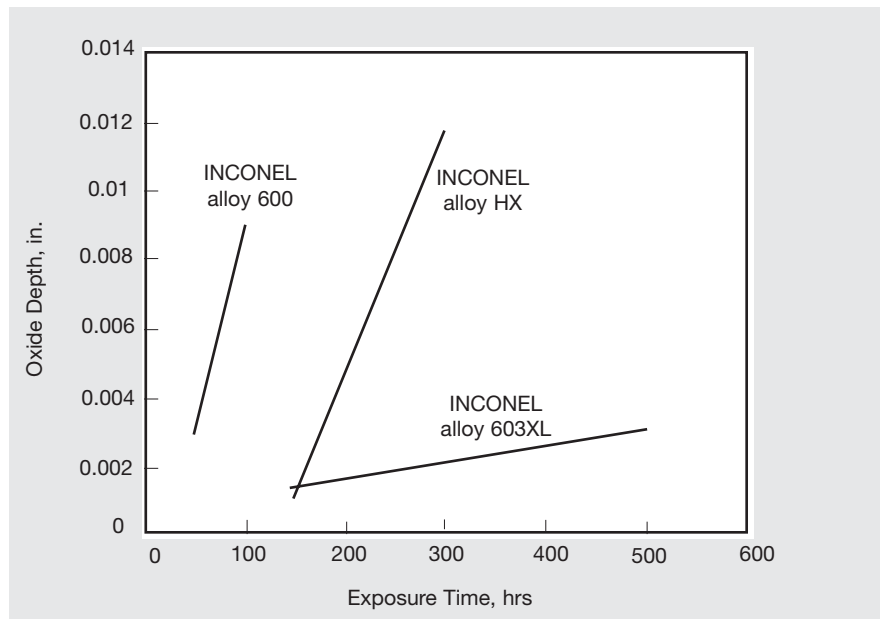

**Figure 5.** Depth of Oxidation After Cyclic Exposure in Oxygen at 1200°C. (One cycle = 2 hrs at temperature + 10 mins cooling to ambient temperature.)

### Nitridation Resistance

INCONEL alloy 603XL has excellent resistance to nitridation up to 1180°C (2150°F). Lacking the alloying elements such as Nb or Al that form internal nitrides INCONEL alloy 603XL exhibits freedom from microstructural degradation in nitrogen based atmospheres.

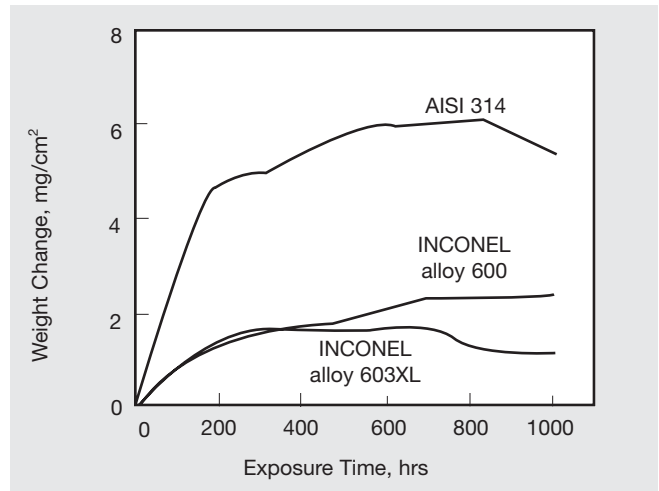


Figure 6. Nitridation Resistance at 1121°C.

### Carburization Resistance

INCONEL alloy 603XL possesses admirable resistance to both oxidizing-carburizing and reducing-carburizing conditions, by virtue of its high nickel content and its scale-forming additions.

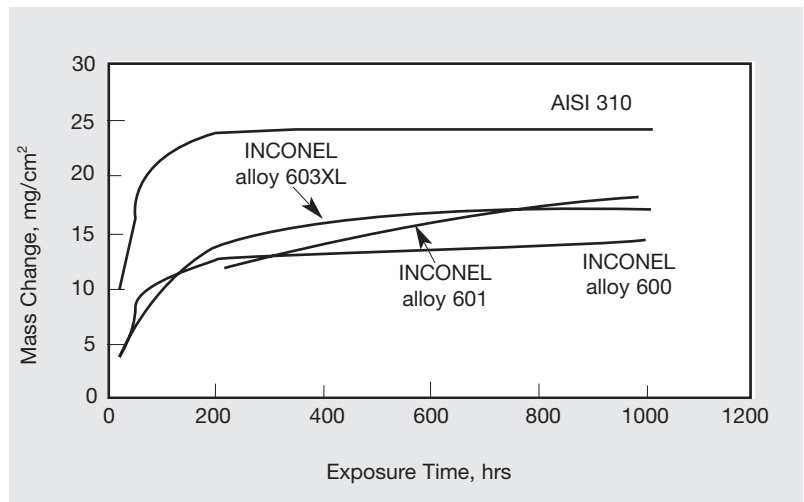


Figure 7. Mass Change After Exposure in H<sub>2</sub>-1%CH<sub>4</sub> at 1000°C.


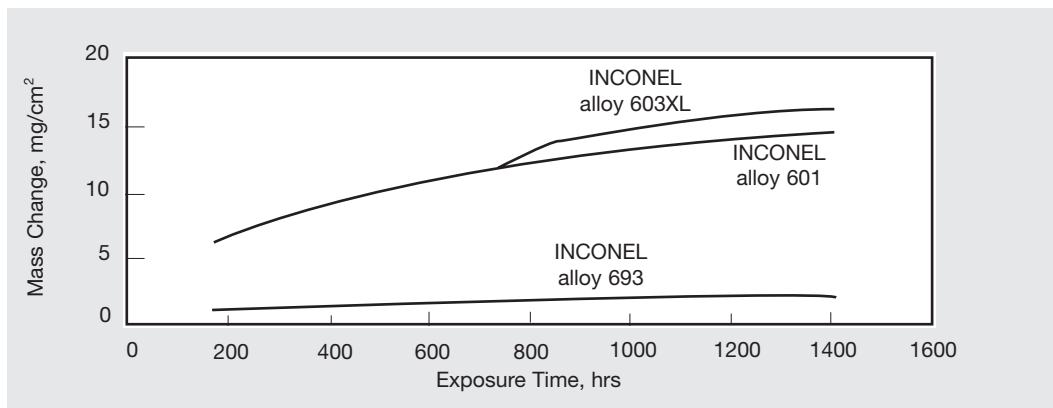



Figure 8. Mass Change After Exposure in H<sub>2</sub>-5.5%CH<sub>4</sub>-4.5%CO<sub>2</sub> at 1000°C.

# INCONEL® alloy 603XL

## Stress Rupture

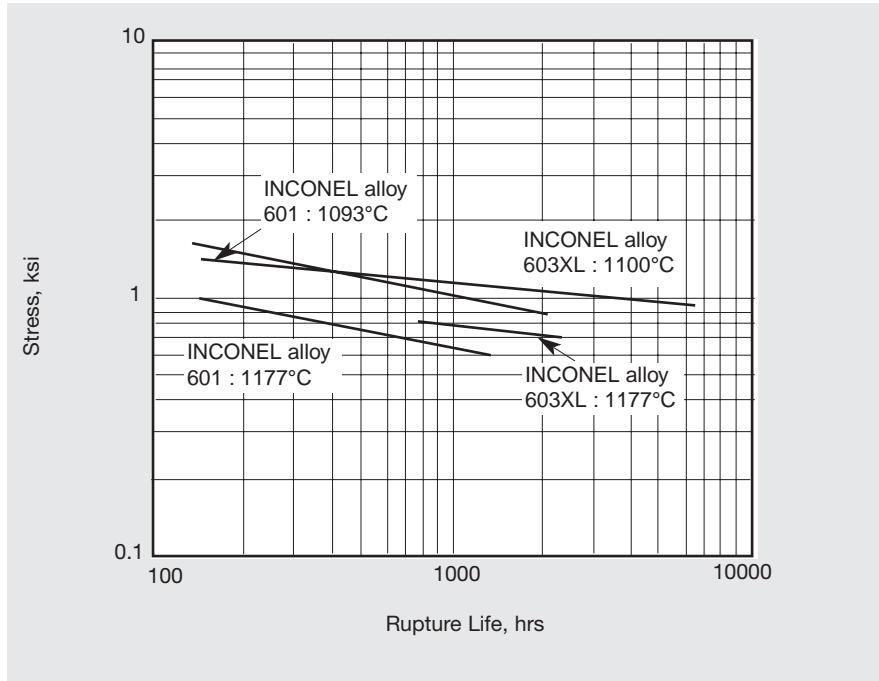

## Creep Rupture Life

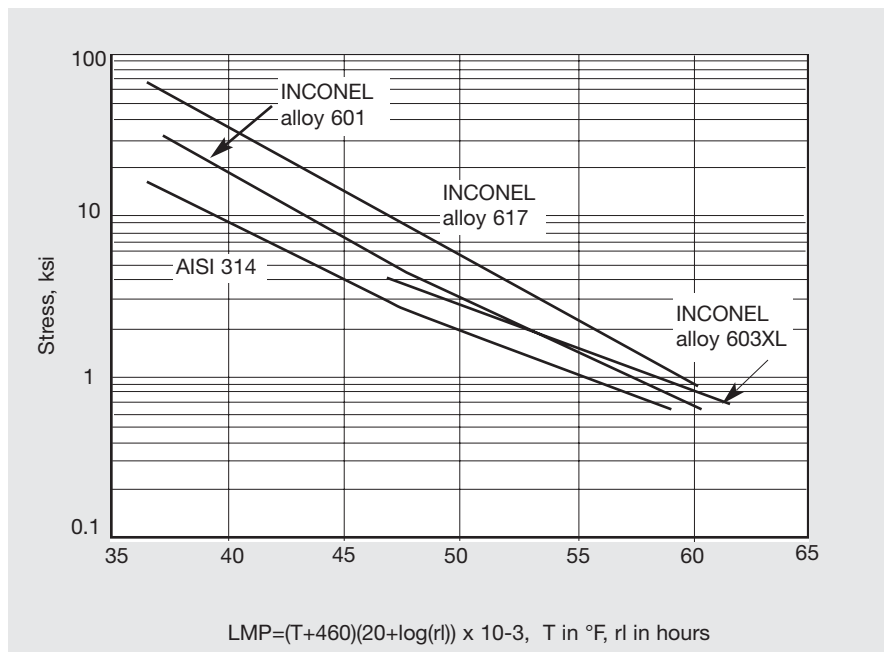

## Heat Treatment


INCONEL alloy 603XL is typically annealed between 1100 °C to 1175 °C followed by air cooling or equivalent.

## Joining

INCONEL alloys are generally joined with the gas tungsten arc welding (GTAW) process; however, other methods are applicable, such as electron beam. Metallurgical factors and characteristics must be considered when selecting any joining process. When using the GTAW process with filler metal additions, the recommended shielding gases are argon or helium or a mixture of the two. Small quantities (<5 %) of hydrogen can be added (to argon) to increase welding penetration and speed for single pass welding. Material should be fabricated with low to moderate heat input levels. Interlayer/pass oxidation must be removed to reduce the potential of weld defects. Direct current, straight polarity is the common choice when GTA welding, however alternating current can be used to help reduce excessive oxidation. Successful weldments have been fabricated with INCONEL alloy 603XL using INCONEL Filler Metal 617.

Thin material is generally joined without filler metal (autogenous) using the Gas Tungsten Arc Welding (GTAW) or Plasma Arc Welding (PAW) processes. Additions of nitrogen (2-5%) to the argon shielding gas have produced acceptable welds in INCONEL alloy 603XL when using the GTAW process. High speed welding using the GTAW process, requires magnetic arc deflection to maintain the arc in proper relation to the torch. While thin gauges can be welded at high speeds, the weld grain structure will be coarse and not exhibit the highest ductility. For optimum ductility, travel speed must be slow enough to produce an elliptical weld puddle rather than the tear-drop shape which results from high speed welding (see figure, below). The solidification direction in elliptical puddles is constantly changing relative to grains, producing a competitive solidification and a resultant finer structure. This in turn will produce the highest as-welded ductility.

Additional guidelines for joining can be found in the Special Metals publication "Joining" on the website, [www.specialmetals.com](http://www.specialmetals.com).

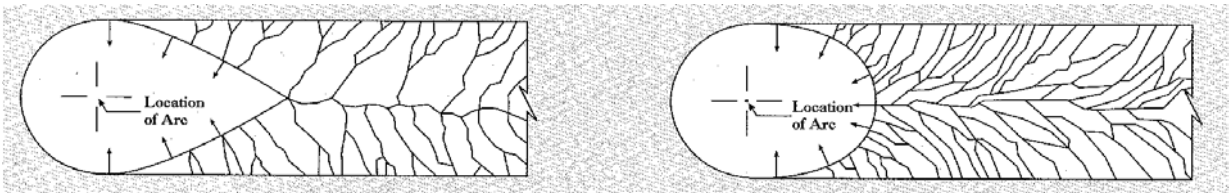

**Figure 11** - Grain Structure as a function of welding speed. High welding speed is illustrated on the left.



www.specialmetals.com

### U.S.A. Special Metals Corporation

#### Billet, rod & bar, flat & tubular products

3200 Riverside Drive  
Huntington, WV 25705-1771  
Phone +1 (304) 526-5100  
+1 (800) 334-4626  
Fax +1 (304) 526-5643

#### Billet & bar products

4317 Middle Settlement Road  
New Hartford, NY 13413-5392  
Phone +1 (315) 798-2900  
+1 (800) 334-8351  
Fax +1 (315) 798-2016

#### Atomized powder products

100 Industry Lane  
Princeton, KY 42445  
Phone +1 (270) 365-9551  
Fax +1 (270) 365-5910

#### Shape Memory Alloys

4317 Middle Settlement Road  
New Hartford, NY 13413-5392  
Phone +1 (315) 798-2939  
Fax +1 (315) 798-6860

### United Kingdom

#### Special Metals Wiggin Ltd.

Holmer Road  
Hereford HR4 9SL  
Phone +44 (0) 1432 382200  
Fax +44 (0) 1432 264030

#### Special Metals Wire Products

Holmer Road  
Hereford HR4 9SL  
Phone +44 (0) 1432 382556  
Fax +44 (0) 1432 352984

### China

#### Special Metals Pacific Pte. Ltd.

Room 1802, Plaza 66  
1266 West Nanjing Road  
Shanghai 200040  
Phone +86 21 3229 0011  
Fax +86 21 6288 1811

#### Special Metals Pacific Pte. Ltd.

Room 910, Ke Lun Mansion  
12A Guanghua Road  
Chaoyang District  
Beijing 100020  
Phone +86 10 6581 8396  
Fax +86 10 6581 8381

### France

#### Special Metals Services SA

17 Rue des Frères Lumière  
69680 Chassieu (Lyon)  
Phone +33 (0) 4 72 47 46 46  
Fax +33 (0) 4 72 47 46 59

### Germany

#### Special Metals Deutschland Ltd.

Postfach 20 04 09  
40102 Düsseldorf  
Phone +49 (0) 211 38 63 40  
Fax +49 (0) 211 37 98 64

### Hong Kong

#### Special Metals Pacific Pte. Ltd.

Unit A, 17th Floor, On Hing Bldg  
1 On Hing Terrace  
Central, Hong Kong  
Phone +852 2439 9336  
Fax +852 2530 4511

### India

#### Special Metals Services Ltd.

No. 60, First Main Road, First  
Block  
Vasanth Vallabha Nagar  
Subramanyapura Post  
Bangalore 560 061  
Phone +91 (0) 80 2666 9159  
Fax +91 (0) 80 2666 8918

### Italy

#### Special Metals Services SpA

Via Assunta 59  
20054 Nova Milanese (MI)  
Phone +390 362 4941  
Fax +390 362 494224

### The Netherlands

#### Special Metals Service BV

Postbus 8681  
3009 AR Rotterdam  
Phone +31 (0) 10 451 44 55  
Fax +31 (0) 10 450 05 39

### Singapore

#### Special Metals Pacific Pte. Ltd.

24 Raffles Place  
#27-04 Clifford Centre  
Singapore 048621  
Phone +65 6532 3823  
Fax +65 6532 3621

### Affiliated Companies

#### Special Metals Welding Products

1401 Burriss Road  
Newton, NC 28658, U.S.A.  
Phone +1 (828) 465-0352  
+1 (800) 624-3411  
Fax +1 (828) 464-8993

Canada House  
Bidavon Industrial Estate  
Waterloo Road  
Bidford-On-Avon  
Warwickshire B50 4JN, U.K.  
Phone +44 (0) 1789 491780  
Fax +44 (0) 1789 491781

#### Controlled Products Group

590 Seaman Street, Stoney Creek  
Ontario L8E 4H1, Canada  
Phone +1 (905) 643-6555  
Fax +1 (905) 643-6614

#### A-1 Wire Tech, Inc.

A Special Metals Company  
4550 Kishwaukee Street  
Rockford, IL 61109, U.S.A.  
Phone +1 (815) 226-0477  
+1 (800) 426-6380  
Fax +1 (815) 226-0537

#### Rescal SA

A Special Metals Company  
200 Rue de la Couronne des Prés  
78681 Epône Cédex, France  
Phone +33 (0) 1 30 90 04 00  
Fax +33 (0) 1 30 90 02 11

#### DAIDO-SPECIAL METALS Ltd.

A Joint Venture Company  
Daido Shinagawa Building  
6-35, Kohnan 1-chome  
Minato-ku, Tokyo 108-0057, Japan  
Phone +81 (0) 3 5495 7237  
Fax +81 (0) 3 5495 1853

